

# BOW ELECTRONIC SOLDERS

## BOW RMA-750LF Rosin Mildly Activated Solder Paste

### Product Description

- Design for Sn/Ag lead-free alloys
- Exceptional print definition
- Long stencil life
- Wide process window
- Excellent wetting on most board finishes
- Low Voiding
- Compatible with enclosed printing heads
- IPC Flux Designation ROM1

### Alloys

Manufactured with low-oxide, spherical and uniformly sized powder. Bow RMA-750LF is available in the following alloys: Sn96.5/Ag3.5, Sn95/Ag5, and Sn95/Sb4 alloys.

### Powder Distribution

Micron Size	Type	Pitch Requirements
75 – 45	Type 2	24 mil & above
45 – 25	Type 3	16 mil to 24 mil
38 – 20	Type 4	12 mil to 16 mil

Micron Size	Type	Pitch Requirements
25 – 15	Type 5	< 12 mil
15 - 5	Type 6	< 8 mil

### Available Packaging

The following packaging options are available for stencil printing and dispensing applications: 250g and 500g jars; 250g and 600g cartridges; 650g ProFlow® cassettes, 35g and 100g syringes.

### Stencil Life

- 6 - 8 hrs. @ 30-45% RH & 22-25° C
- ≈ 4 hrs. @ 45-70% RH & 22-25° C

### Viscosity

Printing applications: 700 to 1,100 Kcps +/- 10%

Dispensing applications: 400 Kcps +/- 10%

Tested according to IPC-TM-650

### Tack Value

Typical tackiness 34g force

### Printing

The print definition of Bow RMA-750LF is ideal for fine pitch applications. The stencil life of this rosin mildly activated product virtually eliminates the waste of solder paste. Consult the powder distribution chart to determine your mesh size requirements.

### Printer Operation

The following are general guidelines for stencil printer optimization with Bow RMA-750LF. Some adjustments may be necessary based on your process requirements.

- Print Speed: 25-100 mm/sec
- Squeegee Pressure: 0.2-0.7 kg/inch of blade
- Under Stencil Wipe: Once every 10-25 prints or as necessary.

## Stencil Cleaning


Automated stencil cleaning systems for both stencil and misprinted boards. Manual cleaning using 99% isopropyl alcohol (IPA) is recommended.

## Storage and Handling Procedures

Refrigerated storage at 42-47° F will prolong the solder paste shelf life to no longer than 6 months. Syringes & cartridges should be stored vertically with the dispensing tip down. Solder paste should be allowed to reach ambient temperature naturally, prior to use (about 6-8 hours). NEVER FREEZE SOLDER PASTE.

## Recommended Profiles:

This profile was designed to serve as a starting position for process optimization using Bow RMA-750LF. A cool down rate of (-) 2-4 C°/second is ideal for the formation of a fine grain structure without risking damage to thermally sensitive components.

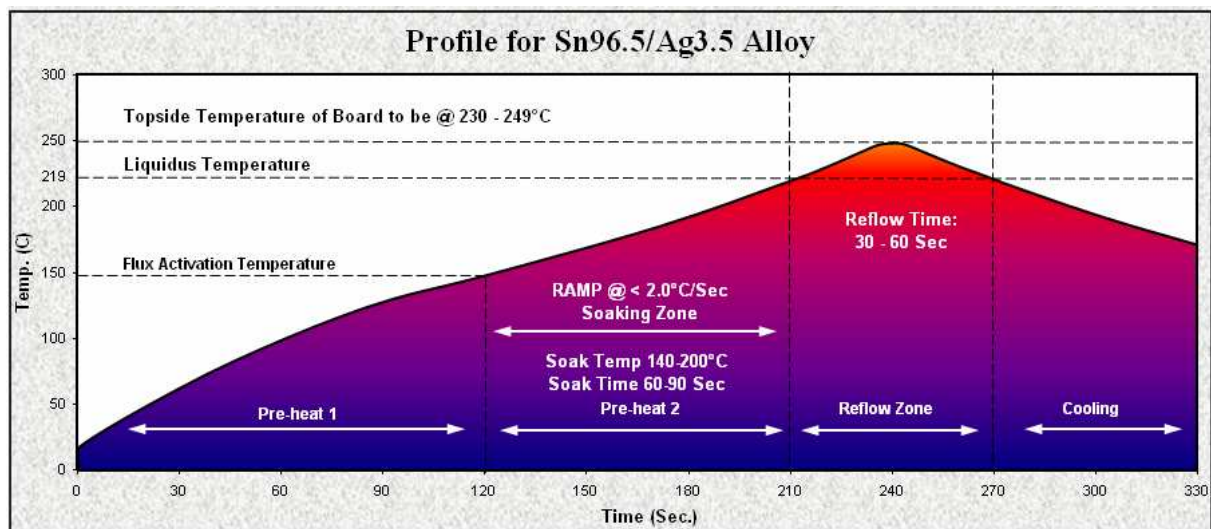

Refer to the MSDS for additional safety information.

The information contained herein is based on data consideration to be accurate and is intended for use by persons having technical skills at their own discretion and risk. Since conditions of use are outside of Bow Electronics control, we cannot assume liability for results obtained or damage incurred due to misuse, nor can we assume customer liability.

1 Crossman Road, Sayreville, NJ 08872

Tel: 732-316-2100 Fax: 732-316-1185

Toll Free: 800-526-4577

[www.solders.com](http://www.solders.com)

11/10 Rev B